

# GEZE OL 90 N



**Slimline fanlight opener  
for top-hung casements,  
outward opening  
with break-down-restraining  
bolting device**

### Product features

- ▶ With break-down-restraining bolting device, certified according to SKG
- ▶ Slim design
- ▶ Easy installation cause the scissors and linkage can be mounted from front
- ▶ Small space requirement below and laterally the casement
- ▶ With release key, simple unhinging of scissors
- ▶ Elements completely pre-assembled, thus few fittings
- ▶ Full opening width with all casement heights

### Applications

- ▶ For vertically installed top-hung casements, outward opening
- ▶ Left hand as well as right hand operation possible
- ▶ Actuation with hand lever, crank rod or electric drive

### Standard version/package

OL 90 N top-hung outward opening, comprising:

- ▶ scissor, concole, casement bracket and two rod guides

Finish		ID No. E = 0-30	ID No. E = 31-60
EV1	right	117700	117773
RAL 9016		117771	117774
acc. to RAL		117772	117775
EV1	left	118060	118083
RAL 9016		118081	118084
acc. to RAL		118082	118085


- ▶ locking device for OL 90 N top-hung, outward opening

Finish	ID No.
EV1	117776
RAL 9016	117777
according to RAL	117778

# GEZE OL 90 N



Slimline fanlight opener for top-hung casements, outward opening, with break-down-restraining bolting device

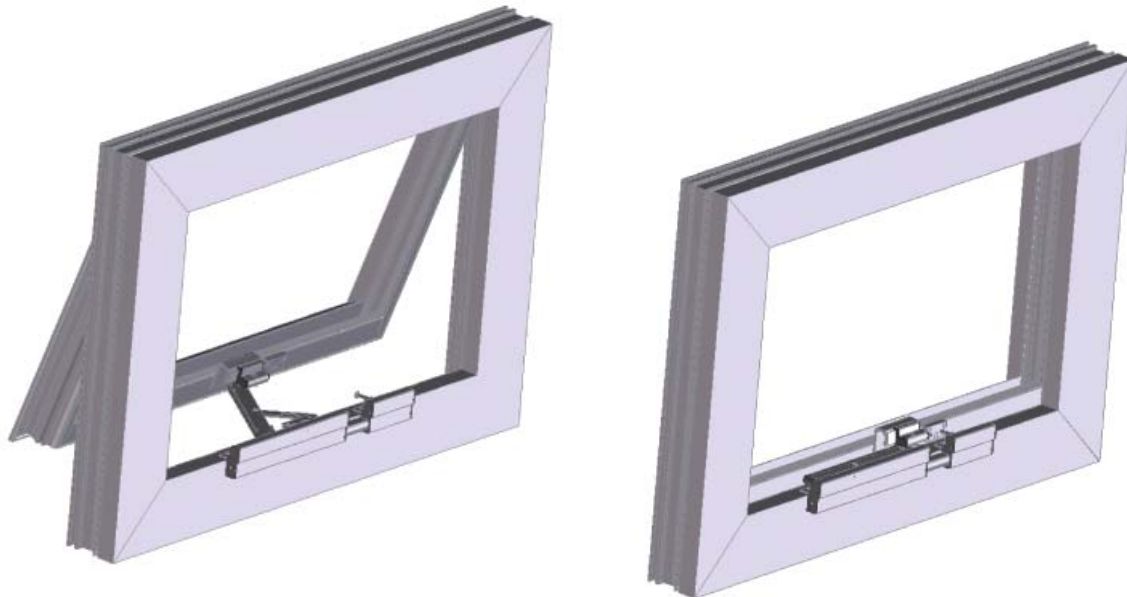

Technical data			
Soffit depth	0 - 60 mm		
Space requirement at bottom	28 mm		
Space requirement lateral, hand lever	min. 22 mm		
Space requirement lateral, gear Fz90	min. 24 mm		
Casement width	600 - 1000 mm 1000 - 1200 mm 1200 - 1500 mm 1500 - 2400 mm	1 scissor 1 scissor 2 scissors 2 scissors	1 locking device 2 locking devices 2 locking devices 3 locking devices
Clear casement height	min. 370 mm		
Opening width	ca. 170 mm		
Fitting stroke	54 mm		
Casement weight	max. 80 kg		
Weight of glass	max. 30 kg/m <sup>2</sup>		

ID No. 124058 · Vers. GB · As at 06/07 · Subject to alterations

